



Keying Shown as example

**CHARACTERISTICS**

- Standard : Based on MIL-DTL-38999 Series III
- Shell Material : Composite
- Shell Plating : Nickel
- Insulator : Thermoplastic
- Contacts : Copper Alloy
- Seals & Grommet : Silicon Elastomer
- Contact Plating : Gold over copper Alloy 0.8µm minimum
- Durability : 500 Mating cycles
- Delivered without Souriau contacts
- Temperature Range : -65°C to +200°C
- Salt Spray : 2000 hours
- Mass : 8.1 g ± 10%

| Connector dimension |          |
|---------------------|----------|
| Dim                 | Nominal  |
| ØS                  | 21.8 Max |
| Z'                  | 31.5 Max |
| VV THREAD           | M12x1-6g |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

**PN: 8D509M35PCL**

|              |            |                          |                         |
|--------------|------------|--------------------------|-------------------------|
| A            | 14-10-2016 | First Release            |                         |
| ISS          | DATE       | Latest modification - by | MOD N°                  |
| Designed By: |            | Date:                    | <b>CUSTOMER DRAWING</b> |


**TITLE** Composite Plug 8D series

|       |  |                                |                 |
|-------|--|--------------------------------|-----------------|
| SCALE |  | General linear Tolerances: ±-- | NPRDS / PROJECT |
| NA    |  |                                | <b>859</b>      |

**SOURIAU** WWW.SOURIAU.COM

This document is the property of SOURIAU it must not be reproduced or communicated without permission

|           |                                     |  |            |
|-----------|-------------------------------------|--|------------|
| FORMAT    | <b>SOURIAU DRG N° 8D509M35PCL-C</b> |  | SHEET      |
| <b>A3</b> |                                     |  | <b>1/2</b> |

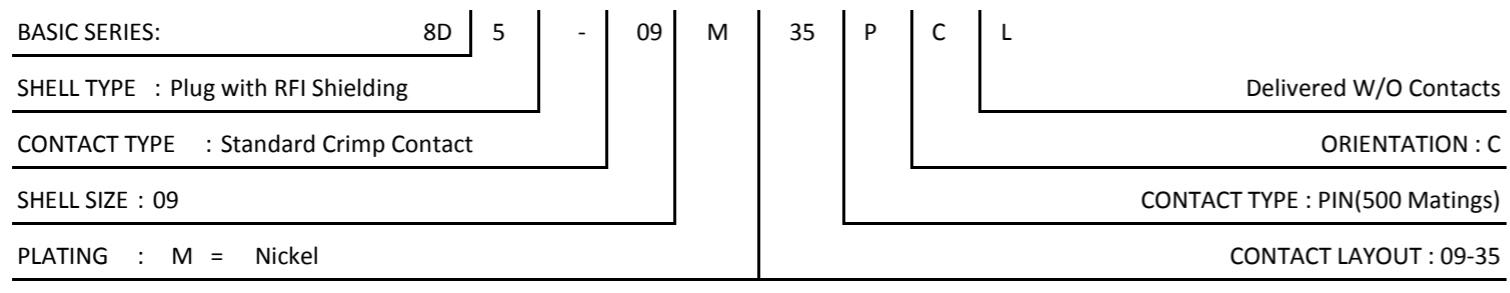

Contact Layout



| Contacts<br>(Insert arrangement 9-35) |                  |             |
|---------------------------------------|------------------|-------------|
| Contact position ID                   | Contact location |             |
|                                       | X-axis (mm)      | Y-axis (mm) |
| 1                                     | +045 (1.14)      | +078 (1.98) |
| 2                                     | +078 (1.98)      | -045 (1.14) |
| 3                                     | +000 (0.00)      | -090 (2.29) |
| 4                                     | -078 (1.98)      | -045 (1.14) |
| 5                                     | -045 (1.14)      | +078 (1.98) |
| 6                                     | +000 (0.00)      | +000 (0.00) |

(Applicable to MIL-DTL-38999 and SAE-AS29600)

| Shell size | Arrangement no. | Number of contacts | Size contacts | Service rating | Contact location | Supersedes |
|------------|-----------------|--------------------|---------------|----------------|------------------|------------|
| 9          | -35             | 6                  | 22D           | M              | All              | MS27525-35 |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

|         |                             |
|---------|-----------------------------|
| Country | Jurisdiction & Control List |
| FR      | Not Listed                  |

PN: 8D509M35PCL

|                |                                     |                                |   |
|----------------|-------------------------------------|--------------------------------|---|
| A              | 14-10-2016                          | First Release                  |   |
| ISS            | DATE                                | Latest modification - by       | MOD N°  |
| Designed By:   |                                     | Date:                          | <b>CUSTOMER DRAWING</b>   |
| <b>TITLE</b>   | <b>Composite Plug 8D series</b>     |                                |   |
| SCALE          |                                     | General linear Tolerances: ±-- | NPRDS / PROJECT<br><b>859</b>   |
| <b>SOURIAU</b> | <b>WWW.SOURIAU.COM</b>              |                                | This document is the property of SOURIAU it must not be reproduced or communicated without permission |
| FORMAT         | <b>SOURIAU DRG N° 8D509M35PCL-C</b> |                                | SHEET<br>2/2  |